

Declaration of performance

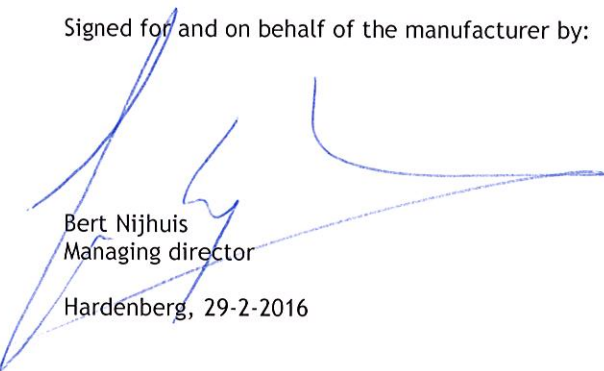
1. Identification code of the product : AIGIS-PXT-2015
2. Batch number for identification of the product : printed on back of product
3. Intended use: Cladding and decoration of external walls of new or refurbished buildings.
4. Manufacturer: Profextru Productie B.V.
Bruchterweg 88
7772 BJ Hardenberg
The Netherlands
5. System of assessment and verification of constancy of performance of the product: 4
6. Declaration of performance for product described in point 1 and 2:

Essential characteristics	Performance	Code	Harmonised technical specification
Resistance to impact	Not less than 15J at 23°C	(23,15)	EN 13245-2 EN 477
Change in colour after artificial ageing with a total radiant energy of 8,0 GJ/m ²	Fastness grade ≥ 3 to the gray scale	A.8.60	DIN EN 13245-3:2010-11 EN 20105-A02
Charpy impact strength after artificial ageing with a total radiant energy of 8.0 GJ/m ²	Reduction less than 50%		DIN EN 13245-3:2010-11 DIN EN ISO 179-1
Linear heat shrinkage (at 75°C, 1h)	$R = \leq 1 \%$	1	EN 479
Reaction to fire performance class	Fire performance B Smoke production s3 Burning drops d0	B-s3,d0	DIN EN 13501-1 : 2010

7. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 7.

This declaration of performance issued under the sole responsibility of the manufacture identified in point 4.

Signed for and on behalf of the manufacturer by:


Bert Nijhuis
Managing director

Hardenberg, 29-2-2016